

SPECIFICATION SHEET

Hand Protection



KOSTO
BUILT STRONG·BÂTI SOLIDE

Cut-Resistant (A6) Gloves High Density Polyethylene Coated With Foam Nitrile Sandy Finish with TPR

MKVA06

Description

This Kosto work glove is made of high-density polyethylene and 18-gauge tungsten that fits the hand with enhanced dexterity. It offers ANSI level A6 cut protection, level 6 abrasion resistance and level 3 puncture resistance. It features a sandblasted foam nitrile palm and fingers that provide excellent grip in a lightly oiled environment. Elasticated cuff prevents debris from entering the glove. This work glove has great features such as reinforced thumbs and TPR Level 1 impact protection with high visibility. The TPR is strategically placed to provide maximum coverage on the back of the hand to disperse the energy of the striking force and protect the bones in the hand.

Materiel

- 18 gauge high density polyethylene and tungsten - 3600g of cut protection
- Palm and fingers coated with nitrile foam with a sandblasted finish
- TPR impact protection back
- Thumb reinforcement

Size

S to 2XL

Certification

ANSI/ISEA 105-2016 certified

Cut resistance **Level A6 –3600g**.

Puncture resistance **Level 3**

Abrasion resistance **Level 6**

ANSI/ISEA 138 certified

Impact protection **Level 1**

Transmitted force ≤9kN



PROTECTION · RELIABILITY · QUALITY

SPECIFICATION SHEET

Hand Protection



KOSTO
BUILT STRONG • BÂTI SOLIDE

Related Products

Gloves
MKV106
Cut resistance Level A6



Gloves Cut resistance
MKVA05
Level A6 with TPR



Leather gloves Cut resistance
MKGV27
Level A5 with TPR




Care and washing instructions

A good way to keep gloves longer is to clean them regularly.

- Low heat wash and tumble dry
- The glove can be washed several times without losing its properties



Sizing Chart

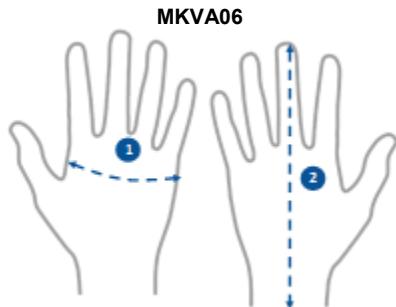

Size Kosto *		S	M	L	XL	2XL	3XL	
1	Width (hand)	cm	8.5	9	9.5	10.5	10.5	11
	po / in	3.3	3.5	3.7	4.1	4.1	4.3	
2	Length (glove)	cm	22.5	23.5	24.5	25.5	26.5	27
	po / in	8.6	9.2	9.6	10	10.4	10.6	

* The measurements are those of the product.

* A fitting is always recommended.